MINERAL SURVEY No. 4086

ARIZONA	Lan	a District.
FI	ELD NOTES	
OF THE SUR	VEY OF THE MINING CLAI	M OF
We	esley Goswick	·
	KNOWN AS THE	
,2,3,4,5,6,7,8,9,10,	11, 12, 13,14,15,16	.17.18.19 and 20 loc
BROWN		Mining District
BROWN Gila Sons 11,12,13,14,15,11nser. Town	nship 7 N., 1	Range 9E
Cila	rship 7 N , 1 ns dated December 21	Range 9E
Cila ions 11,12,13,14,15,11nsey: Town	nship 7 N., 1	Range 9E , 19 28
Cila ions 11,12,13,14,15,11nsey: Town	rship 7 N , 1 ns dated December 21	Range 9E
Cila ions.11,12,13,14,15,11nsey. Town	rship 7 N , 1 ns dated December 21	Range 9E ., 19 28 . Stewart U. S. Mineral Surveyor.
Cila Son 5. 11,12,13,14,15,11nsv; Town Surveyed under instruction Claim located	County, Arizona nship 7 N , 1 ns dated December 21 by Edwin T	Range 9E ., 19 28 . Stewart U. S. Mineral Surveyor.
Cila cons. 11,12,13,14,15,11nsv. Town curveyed under instruction Claim located Survey commenced	county, Arizona nship 7 N , 1 ns dated December 21 by Edwin T	Range 9E ., 19 28 . Stewart U. S. Mineral Surveyor.
Cila Cons. 11,12,13,14,15,11nsey. Town Surveyed under instruction Survey commenced. Survey completed. Address of claiman	County, Arizons nship 7 N , 1 ns dated December 21 by Edwin T See location notice December 22,	Range 9E ., 19 28 . Stewart U. S. Mineral Surveyor. 19 28. , 19 28. , 19 28.
Claim located Survey commenced Survey completed Address of claiman Glob	County, Arizona nship 7 N , 1 ns dated December 21 by Edwin T See location notice December 22, January 18, t'ssattorneys, Rice	Range 9E ., 19 28 . Stewart U. S. Mineral Surveyor. S, 19 28. ., 19 28. ., 19 29. & Mathews,

Feet

MINERAL SURVEY NO. 4086.

ORD #I Lode.

Beginning at Cor. No: 1, identical with N.W. Cor. of the location and Cors. 2, 3 and 4, respectively, of Ord #2, Ord #8 and Ord #9 lodes, this survey.

A standard 2 in. iron pipe, 3 ft. long, with flared base and brass cap stamped 1-0.1-4086 in the quarter facing this claim, set 18 ins. in the ground, with laurel post set alongside, whence

U.S.L.M. No. 4086 bears N.79°-54'-30"W. 4983.8 ft. No other bearings available.

Thence N.69°-55'E.

Along line 4-3 of said Ord #9 lode.

623.70 Bed of Slate Creek, draining easterly.

1498.70 To Cor. No. 2, identical with N.E. Cor. of the location and Cor. No. 3 of said Ord #9 lode.

A standard 2 in. iron pipe, 3 ft. long, with flared base and brass cap stamped 2-0.1-4086 in the quarter facing this claim, set 18 ins. in the ground, with cedar post set alongside, whence

A quartzite boulder, chiseled cross B.R. 4086 bears N.43°-53'E. 32.70 ft.

No other bearings available.

Thence S.34°-00'E.

120.00 Bed of Slate Creek, draining northeasterly.

308.90 To N.E.E.C. monument of the location, from which the discovery cut bears S.69°-55'W. 49.0 ft.

A monument of stone, 4 ft. base, 4 ft. high.

617.80 To Cor. No. 3, identical with S.E.Cor. of the location.

A standard 2 in. iron pipe, 3 ft. long, with flared base and brass cap stamped 3-0.1-4086 in the quarter facing the claim, set 18 ins. in the ground, with mound of stone alongside, whence

A cross on quartzite out crop, about which is chiseled B.R. 4086, bears S.69°-55'W. 17.55 ft.

A cross on quartzite out crop, about which is chiseled B.R. 4086, bears S.34°-00'E. 3.40 ft.

No other bearings available.

Thence S.69°-55'W.

720.40 To Cor. No. 3, Ord#20 lode, this survey.

Along line 3-2 of said Ord #20 lode.

1498.70 To Cor. No. 4, identical with S.W. Cor. of the location and Cor. No. 3, Ord #2 lode, this survey.

On line 2-3, Ord #20 lode, this survey, N.69°-55'E.

720.50 ft. from Cor. No. 2.

A standard 2 in. iron pipe, 3 ft. long, with flared base and brass cap stamped 4-0.1-4086 in the quarter facing this claim, set 18 ins. in the ground, with mound of stone alongside, whence

A cross on schist out crop about which is chiseled B.R. 4086, bears N.34°-00'W. 24.30 ft.

A cross on schist out crop about which is chiseled B.R. 4086, bears S.70°-47'W. 17.57 ft.

No other bearings available.

Thence N.34°-00'W.

Along line 3-2 of said Ord #2 lode.

308.90 To S.W.E.C. monument of the location, identical with N.E.E.C. of said Ord #2 lode.

A monument of stone 3.5 ft. base, 3 ft. high.

617.80 To Cor. No. 1, the place of beginning.

ORD #2 Lode.

Beginning at Cor. No. 1, identical with N.W. Cor. of the location and Cors. 2, 3 and 4, respectively, of Ord #3, Ord #7 and Ord #8 lodes, this survey.

A standard 2 in. iron pipe, 3 ft. long, with flared base and brass cap stamped 1-0.2-4086 in the quarter facing this claim, set 18 ins. in the ground, with cypress post set alongside, whence

U.S.L.M. No. 4086 bears N.68°-22'-40"W. 3765.3 ft. No other bearings abailable.

Thence N.69°-55'E.

1497.40 To Cor. No. 2, identical with N.E. Cor. of the location and Cors. 3, 4 and 1, respectively, of Ord #8, Ord #9 and Ord #1 lodes, this survey.

An iron pipe, with brass cap previously described, stamped 2-0.2 in the quarter facing this claim.

Thence S.34°-00'E.

Along line 1-4 of said Ord #1 lode.

308.90 To N.E.E.C. monument of the location, identical with S.W.E.C. of said Ord #1 lode, from which the discovery cut and tunnel bears S.69°-55'W. 1492.9 ft.

A monument of stone previously described.

617.80 To Cor. No. 3, identical with S.E. Cor. of the location and Cor. No. 4 of said Ord #1 lode.

On line 2-3, Ord #20 lode, this survey.

An iron pipe, with brass cap previously described, stamped 3-0.2 in the quarter facing this claim.

Thence S.69°-55'W.

Along line 3-2 of said Ord #20 lode.

720.50 To Cor. No. 2 of said Ord #20 lode.

1497.40 To Cor. No. 4, identical with S.W. Cor. of the location and Cor. No. 3, Ord #3 lode, this survey.

A standard 2 in. iron pipe, 3 ft. long, with flared base and brass cap stamped 4-0.2-4086 in the quarter facing this claim, set 18 ins. in the ground, with mound of stone alongside, whence

A schist stone, 1.5 x 3.5 ft., flush with the ground, chiseled cross B.R. 4086, bears N.27°-41'E. 24.10 ft.

A schist stone, 2.5 x 3 x 4 ft., out of the ground, chiseled cross B.R. 4086, bears S.18°-40'W. 37.26 ft.

No other bearings available.

Thence N.34°-00'W.

Along line 3-2 of said Ord #3 lode.

308.90 To S.W.E.C. monument of the location, identical with N.E.E.C. of said Ord #3 lode.

A 5 inch cypress post showing 5 ft. above the ground.
617.80 To Cor. No. 1, the place of beginning.

ORD #3 Lode.

Beginning at Cor. No. 1, identical with N.W. Cor. of the location and Cor. No. 4, Ord #7 lode, this survey.

On line 2-3, Ord #4 lode, this survey,

A standard 2 in. iron pipe, 3 ft. long, with flared base and brass cap stamped 1-0.3-4086 in the quarter facing this claim, set 18 ins. in the ground, with cypress post set alongside, whence

U.S.L.M. No. 4086 bears N.48°-43'-30"W. 2854.4 ft.

A cross on schist out crop, about which is chiseled B.R. 4086, bears S.81°-27'E. 26.37 ft.

No other bearings available.

Thence N.69°-56'E:

Along line 4-3 of said Ord #7 lode.

1442.80 To Cor. No. 2, identical with N.E. Cor. of the location and Cors. 3,4 and 1, respectively, of Ord #7, Ord #8 and Ord #2 lodes, this survey.

An iron pipe with brass cap, previously described, stamped 2-0.3 in the quarter facing this claim.

Thence S.34°-00'E.

Along line 1-4 of said Ord #2 lode.

308.90 To N.E.E.C. monument of the location, identical with S.W. E.C. of said Ord #2 lode, from which the discovery cut bears S.69°-55'W. 9.0 ft.

A cypress post previously described.

617.80 To Cor. No. 3, identical with S.E. Cor. of the location and Cor. No. 4 of said Ord #2 lode.

An iron pipe with brass cap, previously described, stamped 3-0.3 in the quarter facing this claim.

Thence S.69°-55'W.

1442.80 To Cor. No.-4, identical with S.W. Cor. of the location.

A standard 2 in. iron pipe, 3 ft. long, with flared base and brass cap stamped 4-0.3-4086 in the quarter facing the claim, set 18 ins. in the ground, with mahogany post

set alongside, whence

A schist stone showing 6 x 9 x 24 ins. out of the ground, chiseled cross B.R. 4086, bears S.38°-40'W. 9.32 ft.

No other bearings available.

Thence N.34°-00'W.

157.30 To Cor. No. 3, Ord #4 lode, this survey.

Along line 3-2 of said Ord #4 lode.

308.90 To S.W.E.C. monument of the location.

A 4 in. mahogany post showing 4.5 ft. above the ground.

458.80 To N.E.E.C. of said Ord #4 lode.

617.80 To Cor. No. 1, the place of beginning.

ORD #4 Lode.

Beginning at Cor. No. 1, identical with N.W. Cor. of the location and Cors. 2 and 4, respectively, of Ord #5 and Ord #6 lodes, this survey.

A standard 2 in. iron pipe, 3 ft. long, with flared base and brass cap stamped 1-0.4-4086 in the quarter facing this claim, set 18 ins. in the ground, with cypress post set alongside, whence

U.S.L.M. No. 4086 bears N.17°-01'-10"W. 2572.9 ft.

A quartzite stone, 1 x 1 x 2.5 ft. out of the ground, chiseled cross B.R. 4086 bears S. 16°-13'W. 17.32 ft.

No other bearings available.

Thence N.62°-05'E.

Along line 4-3 of said Ord #6 lode.

906.30 Road, course northwesterly and southeasterly.

971.30 Road, course northerly and southerly.

1485.30 To Cor. No. 2, identical with N.E. Cor. of the location and Cor. No. 3 of said Ord #6 lode.

On line 4-1, Ord #7 lode, this survey.

A standard 2 in. iron pipe, 3 ft. long, with flared base and brass cap stamped 2-0.4-4086 in the quarter facing this claim, set 18 ins. in the ground, with cypress post set alongside, whence

An 11 in. cypress, blazed and scribed cross B.T. 4086,

bears N.71°-48'E. 16.75 ft.

No other bearings available.

Thence S.34°-00'E.

Along line 1-4 of said Ord #7 lode.

142.50 To Cors. 4 and 1, respectively, of Ord #7 and Ord #3 lodes, this survey.

Along line 1-4 of said Ord #3 lode.

301.50 To N.E.E.C. monument of the location, from which the discovery cut bears S.62°-05'W. 1462.0 ft.

A monument of stone, 4 ft. base, 3 ft. high.

- 451.40 To S.W.E.C. of said Ord # 3 lode.
- 603.00 To Cor. No. 3, identical with B.E. Cor. of the location.

 On line 4-1 of said Ord #3 lode, N.34°-00'W. 157.3 ft.

 from Cor. No. 4.

A standard 2 in. iron pipe, 3 ft. long, with flared base and brass cap stamped 3-0.4-4086 in the quarter facing the claim, set 18 ins. in the ground, with blazed laurel stump alongside.

No bearings available.

Thence S.62°-05'W.

1485.30 To Cor. No. 4, identical with S.W. Cor. of the location.

A standard 2 in. iron pipe, 3 ft. long, with flared base and brass cap stamped 4-0.4-4086 in the quarter facing the claim, set 18 ins. in the ground, with cypress post set alongside, whence

An ll in. cedar, blazed and scribed cross B.T. 4086, bears S.21°-55'W. 21.65 ft.

No other bearings available.

Thence N.34°-00'W.

301.50 To S.W.E.C. monument of the location.

A 4 in. cypress post showing 6 ft. above the ground.

603.00 To Cor. No. 1, the place of beginning.

ORD #5 Lode.

Beginning at Cor. No. 1, identical with N.E. Cor. of the location and Cors. 2, 4 and 1, respectively, of Ord #14, Ord #13 and Ord #6 lodes, this survey.

A standard 2 in. iron pipe, 3 ft. long, with flared base and brass cap stamped 1-0.5-4086 in the quarter facing this claim, set 18 ins. in the ground, with cypress post set alongside, whence

U.S.L.M. No. 4086 bears N. 11°-58'-40"W. 2004.0 ft.

A 12 in. cypress, blazed and scribed cross B.T. 4086, bears S. 03°-34'E. 30.35 ft.

A 7 in. cypress, blazed and scribed cross B.T. 4086, bears N.24°-25'W. 10.00 ft.

No other bearings available.

Thence S.34°-00'E.

301.50 To N.E.E.C. monument of the location, identical with the S.W.E.C. of said Ord #6 lode, from which the discovery cut bears S.63°-57'W. 40.0 ft.

A 5 in. cypress post showing 4.5 ft. above the ground.

603.00 To Cor. No. 2, identical with S.E. Cor. of the location and Cors. 4 and 1, respectively, of Ord #6 and Ord #4 lodes, this survey.

An iron pipe with brass cap, previously described, stamped 2-0.5 in the quarter facing this claim.

Thence S.63°-57'W.

1297.00 To Cor. No. 3, identical with S.W. Cor. of the location.

A standard 2 in. iron pipe, 3 ft. long, with flared base and brass cap stamped 3-0.5-4086 in the quarter facing the claim, set 18 ins. in the ground, with mound of stone alongside, whence

A schist stone 1 x 3 x 3 ft. out of the ground, chiseled cross B.R. 4086, bears \$.49°-05'W. 16.83 ft.

No other bearings available.

Thence N.34°-00'W.

301.50 To S.W.E.C. monument of the location.

A 4 in. laurel post, showing 4 ft. above the ground.

603.00 To Cor. No. 4, identical with N.W. Cor. of the location.

On line 2-3, Ord #14 lode, this survey, N.63°-57'E. 189.4

ft. from Cor. No. 3.

9

A standard 2 in. iron pipe, 3 ft. long, with flared base and brass cap stamped 4-0.5-4086 in the quarter facing the claim, set 18 ins. in the ground, with mound of stone alongside, whence

. A cross about which is chiseled B.R. 4086 on schist out crop bears N.69°-02'E. 5.05 ft.

A cross only (the surface being too rough for other marking) on schist out crop bears S.26°-56'E. 18.40 ft.

No other bearings available.

Thence N.63°-57'E.

Along line 3-2 of said Ord #14 lode.

1297.00 To Cor. No. 1, the place of beginning.

ORD #6 Lode.

Beginning at Cor. No. 1, identical with N.W. Cor. of the location and Cors. 1, 2 and 4, respectively, of Ord #5, Ord #14 and Ord #13 lodes, this survey.

An iron pipe, with brass cap, previously described, stamped 1-0.6 in the quarter facing this claim, whence U.S.L.M. No. 4086 bears N.11°-58'-40"W. 2004.0 ft.

Thence N.62°-05'E.

Along line 4-3 of said Ord #13 lode.

49.00 Road, course northwesterly and southeasterly.

826.30 Road, course northerly and southerly.

982.30 Road, course northeasterly and southwesterly.

1485.30 To Cor. No. 2, identical with N.E. Cor. of the location and Cor. No. 3 of said Ord #13 lode.

On line 4-1, Ord #12 lode, this survey.

A standard 2 in. iron pipe, 3 ft. long, with flared base and brass cap stamped 2-0.6-4086 in the quarter facing this claim, set 18 ins. in the ground, with cedar post set alongside, whence

A cross on schist out crop, about which is chiseled B.R. 4086, bears N.15°-18'E. 39.50 ft.

No other bearings available.

Thence S.34°-00'E.

Along line 1-4 of said Ord #12 lode.

127.70 To Cors. 4 and 1, respectively, of Ord #12 and Ord #7 lodes, this survey.

Along line 1-4 of said Ord #7 lode.

153.50 Road, course northeasterly and southwesterly.

194.50 Road, course northeasterly and southwesterly.

301.50 To N.E.E.C. monument of the location, from which the discovery cut bears S.62°-05'W. 1444.3 ft.

A 4 in. cypress post showing 4.5 ft. above the ground.

436.60 To S.W.E.C. of said Ord #7 lode.

603.00 To Cor. No. 3, identical with S.E.Cor. of the location and Cor. No. 2 Ord #4 lode, this survey.

On line 4-1 of said Ord #7 lode.

An iron pipe with brass cap, previously described, stamped 3-0.6 in the quarter facing this claim.

Thence S.62°-05'W.

Along line 2-1 of said Ord #4 lode.

514.00 Road, course northerly and southerly.

579.00 Road, course northwesterly and southeasterly.

1485.30 To Cor. No. 4, identical with S.W. Cor. of the location and Cors. 1 and 2, respectively, of Ord #4 and Ord #5 lodes, this survey.

An iron pipe with brass cap, previously described, stamped 4-0.6 in the quarter facing this claim.

Thence N.34°-00'W.

Along line 2-1 of said Ord #5 lode.

301.50 To S.W.E.C. monument of the location, identical with N.E.E.C. of said Ord #5 lode.

A cypress post, previously described.

603.00 To Cor. No. 1, the place of beginning.

ORD #7 Lode.

Beginning at Cor. No. 1, identical with N.W. Cor. of the location and Cor. No. 4, Ord #12 lode, this survey.

On line 2-3, Ord #6 lode, this survey.

A standard 2 in. iron pipe, 3 ft. long, with flared base and brass cap stamped 1-0.7-4086 in the quarter facing this claim, set 18 ins. in the ground, with mound of

stone alongside, whence

U.S.L.M. No. 4086 bears N.52°-42'-20"W. 2262.40 ft. No other bearings available.

Thence N.69°-55'E.

Along line 4-3 of said Ord #12 lode.

130.00 Road, course northeasterly and southwesterly.

232.00 Road, course northeasterly and southwesterly.

1442.80 To Cor. No. 2, identical with N.E. Cor. of the location and Cors. 3, 4 and 1, respectively, of Ord #12, Ord #11 and Ord #8 lodes, this survey.

A standard 2 in. iron pipe, 3 ft. long, with flared base and brass cap stamped 2-0.7-4086 in the quarter facing this claim, set 18 ins. in the ground, with cypress post set alongside, whence

A cross on schist out crop, about which is chiseled B.R. 4086, bears S.05°-32'W. 31.30 ft.

No other bearings available.

Thence S. 54°-00'E.

Along line 1-4 of said Ord #8 lode.

308.90 To N.E.E.C. monument of the location, identical with S.W. E.C. of said Ord #8 lode, from which the discovery shaft bears S.69°-55'W. 6.0 ft.

A monument of stone 3 ft. base, 4 ft. high.

617.80 To Cor. No. 3, identical with S.E. Cor. of the location and Cors. 4, 1 and 2 respectively, of Ord #8, Ord #2 and Ord #3 lodes, this survey.

An iron pipe with brass cap, previously described, stamped 3-0.7 in the quarter facing this claim.

Thence S.69°-55'W.

Along line 2-1 of said Ord #3 lode.

1442.80 To Cor. No. 4, identical with S.W. Cor. of the location and Cor. No. 1 of said Ord #3 lode.

On line 2-3. Ord #4 lode, this survey.

An iron pipe with brass cap, previously described, stamped 4-0.7 in the quarter facing this claim.

Thence N.34°-00'W.

Along line 3-2 of said Ord #4 lode.

142.50 To Cors. 2 and 3, respectively, of Ord #4 and Ord #6 lodes, this survey.

Along line 3-2 of said Ord #6 lode.

308.90 To S.W.E.C. monument of the location.

A 6 in. cypress post showing 4.5 ft. above the ground.

444.00 N.E.E.C. of said Ord #6 lode.

551.00 Road, course northeasterly and southwesterly.

592.00 Road, course northeasterly and southwesterly.

617.80 To Cor. No. 1, the place of beginning.

ORD #8 Lode.

Beginning at Cor. No. 1, identical with N.W. Cor. of the location and Cors. 2, 3 and 4, respectively, of Ord #7, Ord #12 and Ord #11 lodes, this survey.

An iron pipe with brass cap. previously described, stamped 1-0.8 in the quarter facing this claim, whence U.S.L.M. No. 4086 bears N.74°-29'-30"W. 3274.1 ft.

Thence N.69°-55'E.

Along line 4-3 of said Ord #11 lode.

855.00 Bed of Slate Creek draining easterly.

1497.40 To Cor. No. 2, identical with N.E. Cor. of the location and Cors. 3, 4 and 1, respectively, of Ord #11, Ord #10 and Ord #9 lodes, this survey.

This corner falling where it is in danger of being washed out by the flood waters of Slate Creek it was not set.

Witness Cor. bears S.34°-00'E. 93.50 ft.

A cross on schist out crop, about which is chiseled B.R. 4086, bears N.32°-59'E. 27.60 ft. from True cor. point
No other bearings available.

Thence S.34°-00'E. from true cor. point.

Along line 1-4 of said Ord #9 lode.

10.00 Bed of Slate Creek draining northeasterly.

93.50 To Witness Cor. for Cor. No. 2, identical with Witness Cor. for Cor. No. 1 of said Ord #9 lode.

A standard 2 in. iron pipe, 3 ft. long, with flared base

and brass cap stamped W. Cor. 2-0.8-4086 for this claim, set 18 ins. in the ground, with sycamore post set alongside.

308.90 To N.E.E.C. monument of the location, identical with S.W. E.C. of said Ord #9 lode, from which the discovery cut bears S.69°-55'W. 35.5 ft.

A monument of stone, 3 ft. base, 3 ft. high.

To Cor. No. 3, identical with S.E. Cor. of the location and Cors. 4, 1 and 2, respectively, of Ord #9, Ord #1 and Ord #2 lodes, this survey.

An iron pipe, with brass cap, previously described, stamped 3-0.8 in the quarter facing this claim.

Thence S.69°-55'W.

Along line 2-1 of said Ord #2 lode.

1497.40 To Cor. No. 4, identical with S.W. Cor. of the location and Cors. 1, 2 and 3, respectively, of Ord #2, Ord #3 and Ord #7 lodes, this survey.

An iron pipe, with brass cap, previously described, stamped 4-0.8 in the quarter facing this claim.

Thence N.34°-00'W.

Along line 3-2 of said Ord #7 lode.

308.90 To S.W.E.C. monument of the location, identical with N.E. E.C. of said Ord #7 lode.

A monument of stone, previously described.

617.80 To Cor. No. 1, the place of beginning.

ORD #9 Lode.

Beginning at Cor. No. 1, identical with N.W. Cor. of the location, and Cors. 2, 3 and 4, respectively, of Ord #8, Ord #11 and Ord #10 lodes, this survey.

Corner previously described and not set.

Witness Corner, identical with Witness Corner for Cor.

No. 2 of said Ord #8 lode, bears S.34°-00'E. 93.5 ft. u.s.m. No. 4086 brs. N.85°28'20" w. 4575.5 ft. from True point for Cor.

Thence N.69°-55'E.

from True point for Cor.

Along line 4-3 of said Ord #10 lode.

1498.70 To Cor. No. 2, identical with N.E. Cor. of the location

and Cor. No. 3 of said Ord #10 lode.

唐

A standard 2 in. iron pipe, 3 ft. long, with flared base and brass cap stamped 2-0.9-4086 in the quarter facing this claim, set 18 ins. in the ground, with mound of stone alongside, whence

A cross on quartzite out crop, about which is chiseled B.R. 4086, bears S.34°-00'E. 14.17 ft.

No other bearings available.

Thence S.34°-00'E.

308.90 To N.E.E.C. monument of the location, from which the discovery cut bears S.69°-55'W. 1474.7 ft.

A monument of stone, 3 ft. base, 3 ft. high.

617.80 To Cor. No. 3, identical with S.E. Cor. of the location and Cor. No. 2, Ord #1 lode, this survey.

An iron pipe with brass cap, previously described,

stamped 3-0.9 in the quarter facing this claim.

Thence S.69°-55'W.

Along line 2-1 of said Ord #1 lode.

875.00 Bed of Slate Creek, draining easterly.

1498.70 To Cor. No. 4, identical with S.W. Cor. of the location and Cors. 1, 2 and 3, respectively, of Ord #1, Ord #2 and Ord #8 lodes, this survey.

An iron pipe, with brass cap. previously described, stamped 4-0.9 in the quarter facing this claim.

Thence N.34°-00'W.

Along line 3-2 of said Ord #8 lode.

308.90 To S.W.E.C. monument of the location, identical with N.E. E.C. of said Ord #8 lode.

A monument of stone, previously described.

524.30 To Witness Corner for Cor. No. 1, identical with Witness Corner for Cor. No. 2, of said Ord #8 lode.

An iron pipe with brass cap, previously described, stamped 1-0.9 for this claim.

617.80 To Cor. No. 1, the place of beginning.

· ORD #10 Lode.

Beginning at Cor. No. 1, identical with N.W. Cor. of the

location and Cors. 2 and 3, respectively, of Ord #11 and Ord #18 lodes, this survey.

A cross on quartzite bed rock, by which is chiseled 1-0.10-4086 for this claim, with mound of stone alongside, whence U.S.L.M. No. 4086 bears S.87°-56'-40"W. 4218.4 ft.

A cross on the northeast face of quartzite bluff, about which is chiseled B.R. 4086, bears S.69°-55'W. 11.95 ft.

No other bearings available.

Thence N.69°-55'E.

1498.70 To Cor. No. 2, identical with N.E. Cor. of the location.

A standard 2 in. iron pipe, 3 ft. long, with flared base and brass caps tamped 2-0.10-4086 in the quarter facing the claim, set 18 ins. in the ground, with mound of stone alongside, whence

A quartzite stone, 9 x 9 ins., flush with the ground, chiseled cross B.R. 4086, bears S.83°-13'E. 18.48 ft. A quartzite stone, 4 x 6 x 10 ins. out of the ground, chiseled cross B.R., 4086 bears S.09°-50'W. 43.20 ft. No other bearings available.

Thence S.34°-00'E.

308.90 To N.E.E.C. monument of the location, from which the discovery cut bears S.69°-55'W. 1421.7 ft.

A monument of stone, 3.5 ft. base, 3.5 ft. high.

617.80 To Cor. No. 3, identical with S.E. Cor. of the location and Cor. No. 2, Ord #9 lode, this survey.

An iron pipe with brass cap. previously described, stamped 3-0.10 in the quarter facing this claim.

Thence, S. 69°-55'W.

Along line 2-1 of said Ord #9 lode.

1498.70 To Cor. No. 4, identical with S.W. Cor. of the location and Cors. 1, 2 and 3, respectively, of Ord #9, Ord #8 and Ord #11 lodes, this survey.

Corner previously described and not set.

Witness Corner, identical with Witness Corner for Cor..
No. 3 of said Ord #11 lode bears N.34°-00'W. 32.8 ft.

Thence N.34°-00'W. from true point for Gor.

好业

Along line 3-2 of said Ord #11 lode.

32.80 To Witness Corner for Cor. No. 4, identical with Witness Corner for Cor. No. 3 of said Ord #11 lode.

A standard 2 in. iron pipe, 3 ft. long, with flared base and brass cap stamped W. Cor. 4-0.10-4086 for this claim,

set 18 ins. in the ground, with sycamore ost set along-side.

308.90 To S.W.E.C. monument of the location, identical with N.E. E.C. of said Ord #11 lode.

A monument of stone, 4 ft. base, 3.5 ft. high.

617.80 To Cor. No. 1, the place of beginning.

ORD #11 Lode.

Beginning at Cor. No. 1, identical with N.W. Cor. of the location and Cors. 2, 3 and 4, respectively, of Ord #12, Ord #19 and Ord #18 lodes, this survey.

A standard 2 in. iron pipe, 3 ft. long, with flared base and brass cap stamped 1-0.11-4086 in the quarter facing this claim, set 18 ins. in the ground, with mound of stone alongside, whence

U.S.L.M. No. 4086 bears N.82°-38'-00"W. 2832.80 ft.

A quartzite stone, 2 x 3.5 x 4 ft. out of the ground, chiseled cross B.R. 4086 bears S.79°-04'W. 16.42 ft.

No other bearings available.

Thence N.69°-55'E.

Along line 4-3 of said Ord #18 lode.

354.00 Bed of Slate Creek, draining southeasterly.

790.40 Road, course northwesterly and southeasterly.

1325.40 Road, course northeasterly and southwesterly.

1497.40 To Cor. No. 2, identical with N.E. Cor. of the location and Cors. 3 and 1, respectively, of Ord #18 and Ord #10 lodes, this survey.

A cross on quartzite bed rock, previously described, by which is chiseled 2-0.11 for this claim.

Thence S.34°-00'E.

Along line 1-4 of said Ord #10 lode.

308.90 To N.E.F.C. monument of the location, identical with S.W.

E.C. of said Ord #10 lode, from which the discovery cut bears S.69°-55'W. 375.0 ft.

A monument of stone previously described.

585.00 To Witness Corner for Cor. No. 3, identical with Witness Corner for Cor. No. 4 of said Ord #10 lode.

An iron pipe with brass cap, previously described, stamped 3-0.11 for this claim.

617.80 To Cor. No. 3, identical with S.E. Cor. of the location and Cors. 4, 1 and 2, respectively, of Ord #10, Ord #9 and Ord #8 lodes, this survey.

Corner previously described and not set.

Witness Corner, identical with Witness Corner for Cor.
No. 4 of said Ord #10 lode, bears N.34°-00'W. 32.8 ft.

Thence S.69°-55'W.
from True point for corner.
Along line 2-1 of said Ord #8 lode.

642.40 Bed of Slate Creek, draining easterly.

1497.40 To Cor. No. 4, identical with S.W. Cor. of the location and Cors. 1, 2 and 3, respectively, of Ord #8, Ord #7 and Ord #12 lodes, this survey.

An iron pipe with brass cap, previously described, stamped 4-0.11 in the quarter facing this claim.

Thence N.34°-00'W.

Alone line 3-2 of said Ord #12 lode.

308.90 To S.W.E.C. monument of the location, identical with N.E. E.C. of said Ord #12 lode.

A 5 in. cypress post showing 5 ft. above the ground.

617.80 To Cor. No. 1, the place of beginning.

ORD #12 Lode.

Beginning at Cor. No. 1, identical with N.W. Cor. of the location and Cor. No. 4, Ord #19 lode, this survey.

On line 2-3 Ord #13 lode, this survey.

A standard 2 in. iron pipe, 3 ft. long, with flared base and brass cap stamped 1-0.12-4086 in the quarter facing this claim, set 18 ins, in the ground, with mound of stone alongside, whence

U.S.L.M. No. 4086 bears N.59°-26'-30"W. 1688.90 ft.

II

A quartzite stone, 1 x 1.5 x 2.0 ft. out of the ground, chiseled cross B.R. 4086, bears S.21°-40'W. 7.13 ft. No other bearings available.

Thence N.69°-55'E.

Along line 4-3 of said Ord #19 lode.

706.80 Road, course northwesterly and southeasterly.

802.80 Road, course easterly and westerly.

1442.80 To Cor. No. 2, identical with N.E. Cor. of the location and Cors. 3, 4 and 1, respectively, of Ord #19, Ord #18 and Ord #11 lodes, this survey.

An iron pipe with brass cap. previously described, stamped 2-0.12 in the quarter facing this claim.

Thence S.34°-00'E.

Along line 1-4 of said Ord #11 lode.

308.90 To N.E.E.C. monument of the location, identical with S.W. E.C. of said Ord #11 lode, from which the discovery cut bears S.69°-55'W. 75.0 ft.

A cypress post previously described.

617.80 To Cor. No. 3, identical with S.E. Cor. of the location and Cors. 4, 1 and 2, respectively, of Ord #11, Ord #8 and Ord #7 lodes, this survey.

An iron pipe with brass cap, previously described, stamped 3-0.12 in the quarter facing this claim.

Thence S.69°-55'W.

Along line 2-1 of said Ord #7 lode.

1210.80 Road, course northeasterly and southwesterly.

1312.80 Road, course northeasterly and southwesterly.

1442.80 To Cor. No. 4, identical with S.W. Cor. of the location and Cor. No. 1 of said Ord #7 lode.

On line 2-3, Ord #6 lode, this survey.

An iron pipe with brass cap. previously described, stamped 4-0.12 in the quarter facing this claim.

Thence N.34°-00'W.

Along line 3-2 of said Ord #6 lode.

127.70 To Cors. 2 and 3, respectively, of Ord #6 and Ord #13 lodes, this survey.

Along line 3-2 of said Ord #13 lode.

308.90 To S.W.E.C. monument of the location.

A monument of stone, 4 ft. base, 3.5 ft. high.

429.20 To N.E.E.C. of said Ord #13 lode.

617.80 To Cor. No. 1, the place of beginning.

ORD #13 Lode.

Beginning at Cor. No. 1, identical with N.W. Cor. of the location and Cor. No. 1, Ord #14 lode, this survey.

A standard 2 in, iron pipe, 3 ft. long, with flared base and brass cap stamped 1-0.13-4086 in the quarter facing this claim, set 18 ins, in the ground, with monument of stone alongside, whence

U.S.L.M. No. 4086 bears N.03°-05'-10"W. 1462.55 ft.

A cross on quartzite out crop, about which is chiseled B.R. 4086, bears S.34°-09'E. 18.23 ft.

No other bearings available.

Thence N.62°-05'E.

1485.30 To Cor. No. 2, identical with N.E. Cor. of the location.
On line 4-1, Ord #19 lode, this survey.

A standard 2 in. iron pipe, 3 ft. long, with flared base and brass cap stamped 2-0.13-4086 in the quarter facing the claim, set 18 ins. in the ground, with mound of stone alongside, whence

A quartzite stone 6 x 6 x 12 ins. out of the ground chiseled cross B.R. 4086 bears S.34°-00'E. 5.06 ft. No other bearings available.

Thence S.34°-00'E.

Along line 1-4 of said Ord #19 lode.

112.90 To Cors. 4 and 1, respectively, of Ord #19 and Ord #12 lodes, this survey.

Along line 1-4 of said Ord #12 lode.

301.50 To N.E.E.C. monument of the location, from which the discovery cut bears S.62°-05'W. 1467.3 ft.

A cross only on quartzite outcrop (too rough to chisel) with monument of stone, 3 ft. base, 3 ft. high alongside.

421.80 To S.W.E.C. of said Ord #12 lode.

603.00 To Cor. No. 3, identical with S.E. Cor. of the location and Cor. No. 2, Ord #6 lode, this survey.

On line 4-1 of said Ord #12 lode.

An iron pipe with brass cap. previously described, stamped 3-0.13 in the quarter facing this claim.

Thence S.62°-05'W.

Along line 2-1 of said Ord #6 lode.

503.00 Road, course northeasterly and southwesterly.

659.00 Road, course northerly and southerly.

1436.30 Road, course northwesterly and southeasterly.

1485.30 To Cor. No. 4, identical with S.W. Cor. of the location and Cors. 1, 2 and 1, respectively, of Ord #6, Ord #14 and Ord #5 lodes, this survey.

An iron pipe with brass cap, previously described, stamped 4-0.13 in the quarter facing this claim.

Thence N.34°-00'W.

Along line 2-1 of said Ord #14 lode.

106.00 Road, course easterly and westerly.

301.50 To S.W.E.C. monument of the location, identical with N.E. E.C. of said Ord #14 lode.

A 4.5 inch cypress post showing 4 ft. above the ground.
603.00 To Cor. No. 1, the place of beginning.

ORD #14 Lode.

Beginning at Cor. No. 1, identical with N.E. Cor. of the location and Cor. No. 1, Ord #13 lode, this survey.

An iron pipe with brass cap, previously described, stamped 1-0.14 in the quarter facing this claim, whence U.S.L.M. No. 4086 bears N.03°-05'-10"W. 1462.55 ft.

Thence S.34°-00'E.

Along line 1-4 of said Ord #13 lode.

301.50 To N.E.E.C. monument of the location, identical with S.W. E.C. of said Ord #13 lode, from which the discovery cut bears S.63°-57'W. 31.0 ft.

A cypress post previously described.

497.00 Road, course easterly and westerly.

603.00 To Cor. No. 2, identical with S.E. Cor. of the location

and Cors. 1, 4 and 1, respectively, of Ord #5, Ord #13 and Ord #6 lodes, this survey.

An iron pipe with brass cap. previously described, stamped 2-0.14 in the quarter facing this claim.

Thence S.63°-57'W.

Along line 1-4 of said Ord #5 lode.

1297.00 To Cor. No. 4 of said Ord #5 lode.

1486.40 To Cor. No. 3, identical with S.W. Cor. of the location and Cor. No. 2, Ord #15 lode, this survey.

A standard 2 in. iron pipe, 3 ft. long, with flared base and brass cap stamped 3-0.14-4086 in the quarter facing this claim, set 18 ins. in the ground, with cypress post set alongside, whence

A cross on the northwest face of schist out crop, about which is chiseled B.R. 4006, bears S.33°-48'E. 26.68 ft. No other bearings available.

Thence N.34°-00'W.

Along line 2-1 of said Ord #15 lode.

301.50 To S.W.E.C. monument of the location, identical with N.E. E.C. of said Ord #15 lode.

A 5 in. cedar post, showing 4.5 ft. above the ground.

422.00 Bed of Slate Creek, draining northeasterly.

485.00 Road, course northeasterly and southwesterly.

603.00 To Cor. No. 4, identical with N.W. Cor. of the location and Cor. No. 1 of said Ord #15 lode.

A standard 2 in, iron pipe, 3 ft. long, with flared base and brass cap stamped 4-0.14-4086 in the quarter facing this claim, set 18 ins. in the ground, with mound of stone alongside, whence

A cross on quartzite out crop, about which is chiseled B.R. 4086, bears S.24°-22'W. 5.88 ft.

A cross on quartzite out crop, about which is chiseled B.R. 4086, bears N.04°-18'W. 24.20 ft.

No other bearings available.

Thence N.63°-57'E.

246.00 Road, course northerly and southerly.

1505

288.00 Bed of Slate Creek, draining northerly.

1486.40 To Cor. No. 1, the place of beginning.

ORD #15 Lode.

Beginning at Cor. No. 1, identical with N.E. Cor. of the location and Cor. No. 4, Ord #14 lode, this survey.

An iron pipe with brass cap, previously described, stamped 1-0.15 in the quarter facing this claim, whence U.S.L.M. No. 4086 bears N.30°-44'-20"E. 2458.6 ft.

Thence S.34°-00'E.

Along line 4-3 of said Ord #14 lode.

118.00 Road, course northeasterly and southwesterly.

181.00 Bed of Slate Creek, draining northeasterly.

301.50 To N.E.E.C. monument of the location, identical with S.W. E.C. of said Ord #14 lode, from which the discovery cut bears S.63°-57'W. 1391.1 ft.

A cedar post, previously described.

603.00 To Cor. No. 2, identical with S.E. Cor. of the location and Cor. No. 3 of said Ord #14 lode.

An iron pipe with brass cap, previously described, stamped 2-0.15 in the quarter facing this claim.

Thence S.63°-57'W.

1495.50 To Cor. No. 3, identical with S.W. Cor. of the location and Cor. No. 2, Ord. #16 lode, this survey.

A standard 2 in. iron pipe, 3 ft. long, with flared base

and brass cap stamped 3-0.15-4086 in the quarter facing this claim, set 18 ins. in the ground, with cedar post

alongside, whence

A schist stone 6 x 12 x 24 ins. out of the ground, chiseled cross B.R. 4086, bears S.61°-57'W. 8.35 ft.

No other bearings available.

Thence N.34°-00'W.

Along line 2-1 of said Ord #16 lode.

207.00 Bed of Slate Creek, draining easterly.

269.00 Road, course easterly and westerly.

301.50 To point for S.W.E.C. monument of the location, identical with point for N.E.E.C. of said Ord. #16 lode.

A 7/8ths inch drill steel, 14 ins. long, driven flush with the ground in the center of road (course easterly and westerly) with mound of stone bearing N.34°W 9.0 ft. therefrom.

603.00 To Cor. No. 4, identical with N.W. Cor. of the location and Cor. No. 1 of said Ord #16 lode.

A standard 2 in. iron pipe, 3 ft. long, with flared base and brass cap stamped 4-0.15-4086 in the quarter facing this claim, set 18 ins. in the ground, with cedar post set alongside:

No bearings available.

Thence N.63°-57'E.

1495.50 To Cor. No. 1, the place of beginning.

ORD #16 Lode.

Beginning at Cor. No. 1, identical with N.E. Cor. of the location and Cor. No. 4, Ord #15 lode, this survey.

An iron pipe with brass cap, previously described, stamped 1-0.16 in the quarter facing this claim, whence U.S.L.M. No. 4086 bears N.43°-11'-20"E. 3799.1 ft.

Thence S.34°-00'E.

Along line 4-3 of said Ord #15 lode.

and westerly) previously described.

301.50 To point for N.E.E.C. monument of the location, identical with point for S.W.E.C. of said Ord #15 lode, from which the discovery cut bears S.63°-57'W. 1312.4 ft.

A piece of drill steel driven in road (course easterly

334.00 Road, course easterly and westerly.

396.00 Bed of Slate Creek; draining easterly.

603.00 To Cor: No. 2, identical with S.E. Cor. of the location and Cor. No. 3 of said Ord #15 lode.

An iron pipe with brass cap, previously described, stamped 2-0.16 in the quarter facing this claim.

Thence S.63°-57'W.

906.00 Bed of Slate Creek, draining northeasterly.

1485.40 To Cor. No. 3, identical with S.W. Cor. of the location and Cor. No. 2; Ord #17 lode, this survey.

A standard 2 in. iron pipe, 3 ft. long, with flared base and brass cap stamped 3-0.16-4086 in the quarter facing this claim, set 18 ins. in the ground, with blazed oak stump alongside, whence

A cross on schist out crop, about which is chiseled B.R. 4086 bears S.15°-06'E. 5.90 ft.

No other bearings available.

Thence N.34°-00'W.

Along line 2-1 of said Ord #17 lode..

- 75.00 Bed of gulch, draining northeasterly.
- 113.00 Road, course northeasterly and southwesterly.
- .301.50 To S.W.E.C. monument of the location, identical with N.E. E.C. of said Ord #17 lode.

A monument of stone 4 ft. base 4 ft. high.

603.00 To Cor. No. 4, identical with N.W. Cor. of the location and Cor. No. 1, of said Ord #17 lode.

A standard 2 in. iron pipe, 3 ft. long, with flared base and brass cap stamped 4-0.16-4086 in the quarter facing this claim, set 18 ins. in the ground, with monument of stone alongside, whence

A quartzite stone, 3.x 4 x 5 ft. out of the ground, chiseled cross B.R. 4086, bears S.67°-16'E. 18.45 ft.

A quartzite stone, 4 x 8 x 5 ft. out of the ground, chiseled cross B.R. 4086, bears S.87°-06'W. 15.47 ft.

No other bearings available.

Thence N.63°-57'E.

1485.40 To Cor. No. 1, the place of beginning.

ORD #17 Lade.

Beginning at Cor. No. 1, identical with N.E. Cor. of the location and Cor. No. 4, Ord #16 lode, this survey.

An iron pipe with brass cap, previously described, stamped 1-0.17 in the quarter facing this claim, whence U.S.L.M. No. 4086 bears N.48°-59'-00"E. 5214.8 ft.

Thence S.34°-00'E.

Along line 4-3 of said Ord #16 lode.

301.50 To .N.E.E.C. monument of the location, identical with S.W.

E.C. of said Ord #16 lode, from which the discovery shaft bears S.63°-57'W. 163.0 ft.

A monument of stone previously described.

490.00 Road, course northeasterly and southwesterly.

.528.00 Bed of gulch, draining northeasterly.

603.00 To Cor. No. 2, identical with S.E.Cor. of the location and Cor. No. 3 of said Ord #16 lode.

An iron pipe with brass cap, previously described, stamped 2-0.17 in the quarter facing this claim.

Thence S.63°-57'W.

792.00 Cross bend in road, course northeasterly and southwesterly.

A standard 2 in. iron pipe, 3 ft. long, with flared base and brass cap stamped 3-0.17-4086 in the quarter facing the claim, set 18 ins. in the ground, with cedar post set alongside, whence

A cross on schist out crop, about which is chiseled B.R. 4086, bears N.55°-07'W. 31.65 ft.

A cross on schist out crop, about which is chiseled B.R. 4086, bears N.54°-02'E. 26.86 ft.

. No other bearings available.

Thence N.34°-00'W.

136.00 Road, course easterly and westerly.

301.50 To S.W.E.C. monument of the location.

A monument of stone, 3 ft. base, 3 ft. high.

306.00 Bed of gulch, draining easterly.

603.00 To Cor. No. 4, identical with N.W. Cor. of the location.

A standard 2 in. iron pipe, 3 ft. long, with flared base and brass cap stamped 4-0.17-4086 in the quarter facing the claim, set 18 ins. in the ground, with mound of stone alongside, whence

A quartzite stone 4 x 5 x 8 ft. out of the ground, chiseled cross only (too hard and rough for further chiseling) bears S.28°-54'E. 14.80 ft.

A quartzite stone 1 x 2 x 3 ft. out-of the ground, chiseled cross B.R. 4086 bears S.82°-29!W. 16.20 ft.

No other bearings available.

Thence N.63°-57'E.

1122.70 To Cor. No. 1, the place of beginning.

ORD #18 Lode.

Beginning at Cor. No. 1, identical with N. W. Cor. of the location and Cor. No. 2, Ord #19 lode, this survey.

A standard 2 in. iron pipe, 3 ft. long, with flared base

and brass cap stamped 1-0.18-4086 in the quarter facing this claim, set 18 ins. in the ground, with mounment of stone alongside, whence

U.S.L.M. No. 4086 bears S.86°-32'-20"W. 2468.4 ft.

A quartzite stone showing 1.5 x 2 x 2 ft. out of the ground, chiseled cross B.R. 4086 bears N.21°-12'W. 8.14 ft.

A quartzite stone showing 1.5 x 3 x 3 ft. out of the ground, chiseled cross B.R. 4086, bears S.24°-53'E.

17.70 ft.

No other bearings available.

Thence N.69°-55'E.

1497.40 To Cor. No. 2 identical with N.E. Cor. of the location.

A standard 2 in. iron pipe, 3 ft. long, with flared base and brass cap stamped 2-0.18-4086 in the quarter facing the claim, set 18 ins. in the ground, with mound of stone alongside, whence

A quartzite stone 1 x 2 ft., flush with the ground, chiseled cross B.R. 4086, bears S.67°-44'W. 47.63 ft.

A quartzite stone, 1.5 x 1.5 ft., flush with the ground, chiseled cross B.R. 4086, bears S.26°-15'W. 56.75 ft.

No other bearings available.

Thence S.34°-00'E.

- 309.90 To N.E.E.C. monument of the location from which the discovery cut bears S.69°-55'W. 34.0 ft.

 A monument of stone, 3.5 ft. base, 3.5 ft. high.
- 455.00 Road, course northeasterly and southwesterly.
- 617.80 To Cor. No. 3, identical with S.E. Cor. of the location and Cors. 1 and 2, respectively, of Ord #10 and Ord #11 lodes, this survey.

A cross on quartzite bed rock, previously described, by which is chiseled 3-0.18 for this claim.

Thence S.69°-55'W.

Along line 2-1 of said Ord #11 lode.

172.00 Road, course northeasterly and southwesterly.

707.00 Road, course northwesterly and southeasterly.

1143.40 Bed of Slate Creek, draining southeasterly.

1497.40 To Cor. No. 4, identical with S.W. Cor. of the location and Cors. 1, 2 and 3, respectively, of Ord #11, Ord #12 and Ord #19 lodes, this survey.

An iron pipe with brass cap, previously described, stamped 4-0.18 in the quarter facing this claim.

Thence N.34°-00'W.

Along line 3-2 of said Ord #19 lode.

279.80 Bed of Slate Creek, draining northeasterly.

308.90 To S.W.E.C. monument of the location, identical with N.E. E.C. of said Ord #19 lode.

A monument of stone, 3.5 ft. base, 3 ft. high.

375.00 Road, course northwesterly and southeasterly.

617.80 To Cor. No. 1, the place of beginning.

ORD #19 Lode.

Beginning at Cor. No. 1, identical with N.W. Cor. of the location.

A standard 2 in. iron pipe, 3 ft. long, with flared base and brass cap stamped 1-0.19-4086 in the quarter facing the claim, set 18 ins. in the ground, with monument of stone alongside, whence

U.S.L.M. No. 4086 bears N.72°-39'-00"W. 1161.70 ft.

A cross on schist out crop, about which is chiseled B.R. 4086, bears N.62°-08'E. 9.47 ft.

A cross on schist out crop, about which is chiseled B.R. 4086, bears S.39°-51'E. 5.80 ft.

No other bearings available.

Thence N.69°-55'E.

1442.80 To Cor. No. 2, identical with N.E.Cor. of the location and Cor. No. 1, Ord #18 lode, this survey.

An iron pipe with brass cap, previously described, stamped 2-0.19 in the quarter facing this claim.

Thence S.34°-00'E.

Along line 1-4 of said Ord #18 lode.

242.80 Road, course northwesterly and southeasterly.

308.90 To N.E.E.C. monument of the location, identical with S.W. E.C. of said Ord #18 lode, from which the discovery shaft bears S.69°-55'W. 107.0 ft.

A monument of stone previously described.

338.00 Bed of Slate Creek, draining northeasterly.

617.80 To Cor. No. 3, identical with S.E. Cor. of the location and Cors. 4, 1 and 2, respectively, of Ord #18, Ord #11 and Ord #12 lodes, this survey.

An iron pipe with brass cap, previously described, stamped 3-0.19 in the quarter facing this claim.

Thence S.69°-55'W.

Along line 2-1 of said Ord #12 lode.

640.00 Road, course easterly and westerly.

736.00 Road, course northwesterly and southeasterly.

1442.80 To Cor. No. 4, identical with S.W. Cor. of the location and Cor. #1 of said Ord #12 lode.

On line 2-3, Ord #13 lode, this survey.

An iron pipe with brass cap, previously described, stamped 4-0.19 in the quarter facing this claim.

Thence N.34°-00'W.

Along line 3-2 of said Ord #13 lode.

112.90 To Cor. No. 2 of said Ord #13 lode.

248.00 Road, course northeasterly and southwesterly.

304.00 Red of Slate Creek, draining northeasterly.

308.90 To S.W.E.C. monument of the location.

A monument of stone, 4 ft. base, 3 ft. high.

617.80 To Cor. No. 1, the place of beginning.

ORD #20 Lode.

Beginning at Cor. No. 1, identical with S.W. Cor. of the location.

A standard 2 in. iron pipe, 3 ft. long, with flared base

and brass cap stamped 1-0.20-4086 in the quarter facing the claim, set 18 ins. in the ground, with monument of stone alongside, whence

U.S.L.M. No. 4086 bears N.60°-03'-00"W. 4832.9 ft.

A cross on schist out crop, about which is chiseled B.R. 4086, bears N.26°-27'E. 37.1 ft.

A cross on schist out crop, about which is chiseled B.R. 4086, bears N.26°-27'E: 7.8 ft.

No other bearings available.

Thence N.26°-27'E.

435.50 To S.W.E.C. monument of the location, from which the discovery cut bears N.69°-55'E. 1476.8 ft.

A monument of stone, 3.5 ft. base, 3.5 ft. high.

871.00 To Cor. No. 2, identical with N.W. Cor. of the location.
On line 3-4. Ord #2 lode, this survey.

A standard 2 in. iron pipe, 3 ft. long, with flared base and brass cap stamped 2-0.20-4086 in the quarter facing the claim, set 18 ins. in the ground, with cypress post set in the ground alongside, whence

A 12 in. cypress blazed and scribed cross B.T. 4086 bears S.68°-54'E. 23.45 ft.

No other bearings available.

Thence N.69°-55'E.

Alone line 4-3 of said Ord #2 lode.

720.50 To Cors. 3 and 4, respectively, of Ord #2 and Ord #1 lodes, this survey.

Along line 4-3 of said Ord #1 lode.

1498.80 To Cor. No. 3, identical with N.E. Cor. of the location.
On line 3-4 of said Ord #1 lode.

A cross and 3-0.20-4086 chiseled on schist bed rock, with monument of stone alongside.

No bearings available.

Thence S.26°-27'W.

435.50 To N.E.E.C. monument of the location.

A 4.5 inch mahogany post, showing 4 ft. above the ground.

871.00 To Cor. No. 4, identical with S.E. Cor. of the location.

11

A standard 2 in. iron pipe, 3 ft. long, with flared base and brass cap stamped 4-0.20-4086 in the quarter facing the claim, set 18 ins. in the ground, with mound of stone alongside, whence

A cross on southwest face of schist out crop, about which is chiseled B.R. 4086 bears N.26°-27'E: 2.13 ft.

No other bearings available.

Thence S.69°-55'W.

1498.80 To Cor. No. 1, the place of beginning.

Mean magnetic variation at all corners, 14°-40'E.

LODE LINES.

As near as can be determined from present developments, the veins of the several locations embraced in this survey extend as follows from their respective discovery points:

Ord #1 lode, N.69°-55'E. 49.0 ft. and S.69°-55'W. 1449.7 ft.

ord #2 lode, N.699-55'E. 1492.9 ft. and S.699-55'W.

Ord #3 lode, N.69°-55'E. 9.0 ft. and S.69°-55'W. 1433.8 ft.

• Ord #4 lode, N.62°-05'E. 1462.0 ft. and S.62°-05'W. 23.3 ft.

Ord #5 lode, N.63°-57'E. 40.0 ft. and S. 63°-57'W. 1257.0 ft.

Ord #6 lode, N.62°-05'E. 1444.3 ft. and S.62°-05'W. 41.0 ft.

Ord #7 lode, N.69°-55'E. 6.0 ft. and S.69°-55'W. 1436.8 ft.

Ord #8 lode, N.69°-55'E. 35.5 ft. and S. 69°-55'W. 1461.9 ft.

Ord #9 lode, N. 69°-55'E. 1474.7 ft. and S. 69°-55'W. 24.0 ft.

Ord #10 lode, N. 69°-55'E. 1427.7 ft. and S.69°-55'W. 77.0 ft.

Ord #11 lode, N.69°-55'E. 375.0 ft. and S.69°-55'W. 1122.4 ft.

Ord #12 lode, N.69°-55'E. 75.0 ft. and S.69°-55'W. 1367.8 ft.

Ord #13 lode, N.62°-05'E. 1467.3 ft. and S.62°-05'W.

Ord #14 lode, N.63°-57'E. 31.0 ft. and S.63°-57'W. 1455.4 ft.

Ord #15 lode, N.63°-57'E. 1391.1 ft. and S.63°-57'W. 104.4 ft.

Ord #16 lode, N.63°-57'E. 1312.4 ft. and S.63°-57'W. 173.0 ft.

Ord #17 lode, N.63°-57'E. 163.0 ft. and S.63°-57'W. 959.7 ft.

Ord #18 lode, N.69°-55'E. 34.0 ft. and S.69°-55'W. 1463.4 ft.

Ord #19 lode, N.69°-55'E. 107.0 ft. and S.69°-55'W. 1335.8 ft.

Ord #20 lode, N.69°-55'E. 22.0 ft. and S.69°-55'W. 1476.8 ft.

000000000000000

AREAS.

Total	area	Örd	#1	lode,				Acres. 20.632
Total	area	Ord	#2	lode,				20.614
Total	area	Ord	#3	lode,		300		19.862
Total	area	Ord	#4	lode,				20.445
Total	area	Ord	#5	lode,				17.782
Total	area	Ord	#6	lode,	• • • •			20.445
Total	area	Ord	#7	lode,				19.862
Total	area	Ord	#8	lode,				20.614
Total	area	Ord	#9	lode,				20.632
Total	area	Ord	#10	lode,	.10			20.632
Total	area	Ord	#13	l lode,				20.614
Total	area	Ord	#12	lode,	· Ale			19.862
Total.	area	Ord	#13	o lode,				20.445
Total	area	Ord	#14	lode,				20.378
Total	area	Ord	#is	o lode,				20.503
Total	area	0rd	#16	S lode,	T B			20.365
Total	area	Ord	#1"	7 lode,			• 74	15.392
Total	area	Ord	#18	B lode,	(1), 1 a)			20.614
Total	area	Ord	#19	lode,	I .ab			19.862
Total	area	Ord	#20	lode,				20.617

LOCATION.

This survey is located approximately in sections 11, that the land 15, T. 7 N., R. 9 E., G. & S.R.M., unsurveyed, Brown Mining District, Gila County, Arizona, in the Tonto National Forest.

ADJOINING AND CONFLICTING CLAIMS.

The Mercury #13, Mercury #12, Mercury #9, Mercury #8, Mercury #5, Mercury #4, Mercury #1 and Mercury #15 lodes, unsurveyed, owned by the Mercury Mines of America Inc.. adjoin and conflict on the northwest side of the group. The Red Wing #1 lode, unsurveyed, owned by the Mercury Mines of America Inc., and the Red Bird #10 lode, unsurveyed, owned by the . Arizona Cinnabar Company adjoin on the northeast end of the group. The Red Bird #9 lode, unsurveyed, owned by the Arizona Cinnabar Company; an unknown claim, unsurveyed, owner unknown; the Mercury #16. Mercury #17 and Mercury #18 lodes, owned by the Mercury Mines of America Inc.; the Edna #2 and Edna #1 lodes. unsurveyed, owned by the claimant; the Montezuma lode. unsurveyed, owned by Fred Packard; and the Rattlesnake No. 7 lode, unsurveyed, owned by Alfred Packard, adjoin and conflict on the southeast side of the group. The Rattlesnake No. 1 lode, unsurveyed, owned by Alfred Packard adjoins the group on the southwest end.

00000000000000

DISCOVERY AND IMPROVEMENTS.

I certify that the value of the labor and improvements made upon, or for the benefit of, each of the claims in this survey, by the claimant or his grantors is not less than five hundred dollars, and that said improvements consist of:

Ord #1 Lode.

No. 1, the discovery, cut 4 x 10 x 12 ft., the center of the face of which is on the lode line 49.0 ft. from the N.E.E.C., and which extends thence N.28° W. to toe. Value, \$35.00.

No. 2, cut, 4.5 x 11 x 18 ft., the center of the toe of which bears S.24°-38'E. 47.2 ft. from the N.E.E.C., and which extends thence S.23°E. to face. Value, \$40.00.

1/20th of improvement No. 2 on the Ord #13 lode

which is credited to this claim. Value \$753.50.

Ord #2 Lode.

No. 1, the discovery, cut, 4 x 10 x 20 ft. and 6.5 ft. of tunnel, 3.5 x 6 ft. the center of the face of the tunnel being on the lode line 4.5 ft. from the S.W.E.C., and which extends thence N.35°W. 26.5 ft. to toe of cut. Value, \$65.00.

of the value 1/20th. of improvement No. 2 on the Ord #13 lode which is credited to this claim. Value \$753.50.

Ord #3 Lode.

No. 1, the discovery, cut, 4.5 x 10 x 22 ft., the center of the face of which is on the lode line 9.0 ft. from the N.E.E.C., and which extends thence N.35°W.to toe. Value, \$45.00.

of the value of 1/20th. of improvement No. 2 on the Ord #13 Lode which is credited to this claim. Value \$753.50.

Ord #4 Lode.

No. 1, the discovery, cut, 4 x 10 x 13^{ff}, the center of the faceof which is on the lode line 23.3 ft. from the S.W.E.C., and which extends thence N.50° W. to toe. Value, \$35.00.

of the value 1/20th. of improvement No.2 on the Ord #13 lode which is credited to this claim. Value \$753.50.

Ord #5 Lode.

No. 1, the discovery, cut, 4.5 x 10 x 14 ft., which is intersected by the lode line 40.0 ft. from the N.E.E.C., and which extends thence west 10.5 ft. to face and east 3.5 ft. to toe. Value, \$35.00.

1/20th., of improvement No. 2 on the Ord #13 lode which is credited to this claim. Value \$753.50.

Ord #6 Lode.

No. 1, the discovery, cut, 4.5 x 10 x 16 ft., the center of the toe of which is on the lode line 41.0 ft. from the S.W.E.C., and which extends thence S.28°E. to face. Value \$40.00.

No. 2, 1262.62 feet of tunnel, 5 x 7 ft., the center

of the east portal of which bears S.68°-57'E. 172.4 ft. from a point on line 1-2, 234.6 ft. from Cor. No. 2, and which extends thence N.33°-27'W. 103.84 ft. to pt. 1; thence N.33°-55'W. 41.35 ft. to pt. 2; thence N.79°-27'W. 23.34 ft. to pt. 3; thence S.82°-13'W. 99.97 ft. to pt. 4: thence S.77°-37'W. 19.46 ft. to pt. 5; thence S.27°-24'E. 10.82 ft. to pt. 6; thence S.02°-27'W. 20.57 ft. to pt. 7; thence S.64°-16'W. 84.19 ft. to pt. 8; thence S.52°-51'W. 31.69 ft. to pt. 9; thence S.78°-11'W. 30.95 ft. to pt. 10; thence S. 88°-57'W. 77.28 ft. to pt. 11; thence N.85°-54'W. 106.76 ft. to pt. 12; thence N. 85°-26'W. 142.20 ft. to pt. 13; thence N.83°-Ol'W. 77.76 ft. to the west portal. From pt. 6 a crosscut extends N.35°-36'W. 28.71 ft. to pt. 14; thence N.36°-24'W. 105.67 ft. to pt. 15; thence N.11°-42'W. 44.5 ft. to face. And, from pt. 12 a crosscut extends S.44°-59'E. 29.56 ft. to pt. 16; thence S.00°-33' E. 184.0 ft. to face. Value, \$19,000.00.

This tunnel being located on the Ord #6 lode and the Ord #13 lode, the value thereof is distributed equally between these two claims, \$9,500.00 being credited to each.

Value 1/2 interest credited to this claim, \$9,500.00

1/20th.v of improvement No. 2 on the Ord #13 lode which is credited to this claim. Value, \$753.50.

Ord #7 Lode.

No. 1, the discovery, shaft, 7 x 7 x 8 ft., the center of the southwest side of which is on the lode line 6.0 ft. from the N.E.E.C. Value, \$50.00.

of the value 1/20th. of improvement No. 2 on the Ord #13 lode which is credited to this claim. Value \$753.50.

Ord #8 Lode. .

No. 1, the discovery, cut, 4.5 x 10 x 25 ft., which is intersected by the lode line 35.5 ft. from the N.E.E.C., and which extends thence N.69°W. 3.0 ft. to face and S.69° E. 22.0 ft. to toe. Value, \$45.00.

1/20th. of improvement No. 2 on the Ord #13 lode which is credited to this claim. Value \$753.50.

Ord #9 Lode.

No. 1, the discovery, cut, 5 x 10 x 25 ft., which is intersected by the lode line 24.0 ft. from the S.W.E.C., and which extends thence N.80°W. 7.0 ft. to face and

S.80°E. 18.0 ft. to toe. Value, \$45.00.

of the value 1/20th. of improvement No. 2 on the Ord #13 lode which is credited to this claim. Value, \$753.50.

Ord #10 Lode.

No. 1, the discovery, cut, 4 x 10 x 15 ft., the center of the face of which is on the lode line 77.0 ft. from the S.W.E.C., and which extends thence S.35°E. to toe. Value, \$35.00.

No. 2, cut, 4 x 11 x 13.5 ft., the center of the toe of which bears S.63°-40'E. 57 ft. from the S.W.E.C., and which extends thence N.17°W. to face. Value, \$35.00.

1/20th. of improvement No. 2 on the Ord #13 lode which is credited to this claim. Value, \$753.50.

· Ord #11 Lode.

No. 1, the discovery, cut, 4 x 10 x 14 ft., the center of the face of which is on the lode line 375.0 ft. from the N.E.E.C., and which extends thence S.75°E. to toe. Value, \$35.00.

No. 2, cut, 4.5 x 10 x 21 ft., the center of the toe of which bears S.04°-50'W. 51.0 ft. from the N.E.E.C., and which extends thence N.35°W. to face. Value, \$45.00.

of the value 1/20th. of improvement No. 2 on the Ord #13 lode which is credited to this claim. Value, \$753.50.

Ord #12. Lode.

No. 1, the discovery, cut, 4 x 10 x 22 ft., which is intersected by the lode line 75.0 ft. from the N.E.E.C., and which extends thence S.80°E. 20.0 ft. to face and N.80°W. 2.0 ft. to toe. Value, \$45.00.

of the value

1/20th. of improvement No. 2 on the Ord #13 lode which is credited to this claim. Value, \$753.50.

Ord #13 Lode.

No. 1, the discovery, cut, 4.5 x 10 x 17 ft., which is intersected by the lode line 18.0 ft. from the S.W.E.C. and which extends thence S.24°E. 7.5 ft. to face and W.24°W. 9.5 ft. to toe. Value, \$35.00.

No. 2, 597.40 feet of tunnel, 5 x 7 ft., Value \$8960.00; 97 feet of vertical winze, 4 x 6 ft. in the clear of timbers, value, \$2500.00; 97.51 ft. of drifting and crosscutting, 5 x 7 ft., from the winze at a depth of 48 feet below the collar, value \$1460.00; and 143.41

feet of drifting and crosscutting, 5 x 7 ft., from the bottom of the winze, 97 ft. below the collar, value, \$2150.00. Total value of improvement, \$15070.00. The portal of the tunnel bears N.63°-11'W. 368.1 ft. from a point on line 3-4, 631.0 ft. from Cor. No. 3, and the tunnel extends thence S.55°-41'W. 21.87 ft. to pt. 1; thence S.63°-14'W. 41.40 ft. to pt. 2; thence S.80°-14'W. 39.05 ft. to pt. 3: thence S.64°-14'W. 20.35 ft. to pt. 4; thence N.61°-51'W. 14.85 ft. to pt. 5; thence S.63°-13'W. 20.05 ft. to pt. 6; thence S.88°-57'W. 34.40 ft. to pt. 7; thence S.49°-44'W. 17.05 ft. to pt. 8; thence S.33°-43'W. 17.60 ft. to pt. 9; thence S. 10°-48'W. 12.00 ft. to pt. 10; thence S. 15°-57'E. 18.00 ft. to pt. 11; thence S.03°-11'E. 71.75 ft. to pt. 12; thence S.17°-55'E. 200.00 ft. to face. And, from pt. 5, a branch of the tunnel extends N.45°-O5'E: 20.45 ft. to pt. 13; thence N.72°-15'E. 24.58 ft. to pt. 14; thence S.47°-54'E. 24.0 ft. and connects with the main tunnel between points 2 and 3.

The center of the collar of the winze is located between points 5 and 13, 8.0 ft. from pt. 5 and extends vertically down 97 ft. At a depth of 48 ft. below the collar of the winze and from the center of the northwest side, a level extends N.43°-58'W. 12.51 ft. to pt. 1; thence N.64°-20'E. 36.0 ft. to face. And, from pt. 1, S.68°-18'W. 49.0 ft. to face.

From the bottom of the winze, 97 feet below the collar and from the northwest side, a level extends N.43°-58'W. 11.78 ft. to pt. 1; thence N.39°-44'W. 25.63 ft. to pt. 2; thence N.50°-07'E. 61.0 ft. to face. And, from pt. 2, S.59°-40'W. 45.0 ft. to face.

The above described improvement has been made by the claimant as a common improvement for the benefit of all the claims in the group. Mining operations are now being carried on in several places, and it is proposed to sink the winze to greater depth and by drifts and crosscuts

toward and under the claims of the group from lower levels and the two levels now started, develop and mine each of the claims in the group. The improvement being the centrally located in the group and plan of developing the claims from it being feasible and consistent with the best mining practice, I have accepted it as a common improvement and distributed the value thereof equally among the claims, 1/20th., or \$753.50, being credited to each claim. Value of 1/20th interest credited to this claim, \$753.50

the value of 1/2 of improvement No. 2 on the Ord #6 lode which is credited to this claim. Value, \$9,500.00.

Ord #14 Lode.

No. 1, the discovery, cut, 4.5 x 11 x 18 ft., the center of the face of which is on the lode line 31.0 ft. from the N.E.E.C., and which extends thence N.16°W. to toe. Value, \$40.00.

No. 2, shaft, 4 x 6 in the clear of timbers, 97.0 ft. deep, the N.E. Cor. of which bears N.67°-48'W. 175.20 ft. from Cor. No. 2. Value, \$30.0.00.

of the value 1/20th of improvement No. 2 on the Ord #13 lode which is credited to this claim. Value \$753.50.

Ord #15 Lode.

No. 1, the discovery, cut, 4 x 10 x 17 ft., the center of the face of which is on the lode line 104.4 ft. from the S.W.E.C., and which extends thence S.40°E. to toe. Value, \$40.00.

No. 2, cut, 4 x 10 x 19 ft., the center of the toe of which bears S.16°E. 32.7 ft. from a point on the lode line 75.1 ft. from the S.W.E.C., and which extends thence N.17°W. to face. Value, \$45.00.

of the value

1/20th. of improvement No. 2 on the Ord #13 lode

which is credited to this claim. Value \$753.50.

the value of

1/2 of improvement No. 3 on the Ord #16 lode which is credited to this claim. Value, \$1150.00.

Ord #16 Lode.

No. 1, the discovery, cut, 4 x 10 x 13 ft,, the

Burgara st Ft bars , s

center of the face of which is on the lode line 173.0 ft. from the S.W.E.C., and which extends thence S.20°W. to toe. Value, \$35.00.

No. 2, cut, 4.5 x 10 x 12 ft., the center of the toe of which bears N.72°-05'E. 197.3 ft. from the S.W.E.C., and which extends thence N.32°-00'E. to face. Value, \$40.00.

No. 3, 156.54 feet of tunnel, 5 x 7 ft., the center of the portal of which bears N.84°-27'W. 98.45 ft. from the N.E.E.C. and which extends thence N.08°-56'E. 50.65 ft. to pt.1; thence N.01°-33'W. 33.59 ft. to pt. 2; thence N.25°-30'W. 16.90 ft. to pt. 3; thence £.58°-40'W. 33.70 ft. to pt. 4; thence S.39°-35'W. 19.0 ft. to face. And, from pt. 2, N.48°E. 27.0 ft. to face. Value, \$2300.00

This tunnel being located on the Ord #16 lode and the Ord #15 lode, the value thereof is distributed to these two claims, \$1150.00 being credited to each. Value of 1/2 interest credited to this claim,

1/20th of improvement No. 2 on the Ord #13 lode of the value which is credited to this claim. Value, \$753.50.

Ord #17 Lode.

No. 1, the discovery, shaft, 4 x 6 x 8 ft., the center of which is on the lode line 163.0 ft. from the N.E.E.C. Value, \$40.00.

No. 2, cut, 4 x 10 x 24 ft., the center of the face of which bears S.53°-33'W. 134.0 ft. from the N.E.E.C., and which extends thence S.60°E. to toe. Value, \$50.00. of the value

1/20th. of improvement No. 2 on the Ord #13 lode which is credited to this claim. Value, \$753.50.

Ord #18 Lode.

No. 1, the discovery, cut, 5 x 10 x 33 ft., which is intersected by the lode line 34.0 ft. from the N.E.E.C., and which extends thence S.40°W. 3.5 ft. to face and N.40°E. 29.5 ft. to toe. Value, \$65.00.

1/20th, of improvement No. 2 on the Ord #13 lode which is credited to this claim. Value \$753.50.

Ord #19 Lode.

No. 1, the discovery, shaft, 7 x 9 x 8.5 ft., the center of which is on the lode line 107.0 ft. from the N.E.E.C. Value \$45.00.

of the value
1/20th. of improvement No. 2. on the Ord #13 lode
which is credited to this claim. Value, \$753.50.

Ord #20 Lode.

No. 1, the discovery, cut. 5 x 10 x 14.ft., which is intersected by the lode line 22.0 ft. from the N.E.E.C., and which extends thence S.47°E. 4.5 ft. to face and N.47°W. 9.5 ft. to toe. Value, \$30.00.

No. 2, 33 ft. of cut and tunnel, 3.5 x 6 ft., the center of the toe of which bears S.59°-26'W. 201.0 ft., from the N.E.E.C. and which extends thence S.76°W. to face. Value, \$200.00.

of the value 1/20th. of improvement No. 2 on the Ord #13 lode which is credited to this claim. Value, \$753.50.

OTHER IMPROVEMENTS.

A tunnel, 4 x 6 x 162 ft., the center of the portal of which bears N.50°-29'E. 52.5 ft. from a point on line 3-4 of the Ord #1 lode, 311.2 ft. from Cor. No. 3, and which extends thence S.02°-58'W. to face. This improvement not having been made by the claimant or his grantors the value thereof is not credited to the Ord #1 lode.

A lumber ore bin, 10 x 10 ft., course of side N.52°E., the N.W. Cor. of which bears S.66°-13'E. 190.4 ft. from a point on line 1-2 of the Ord #6 lode, 234.6 ft. from Cor. No. 2.

A lumber ore bin, 12 x 23.5 ft., course of long lides S.55°E., the S.E. Cor. of which bears N.32°-03'E. 189.1 ft. from a point on line 3-4 of the Ord #12 lode 1197.2 ft. from Cor. No. 3.

A corrugated iron crushing plant, 19 x 33 ft., course of long sides, S.55°E., the S.W. Cor. of which bears

N.37°-08'E. 187.2 ft. from the above described point.

An lore reducing plant constructed of lumber and corrugated iron, of irregular shape, 100.5 ft. wide and 228.6 ft. long, course of long sides 5.23°-58'W. the N.W. Cor. of which bears 5.75°-34'W. 209.0 ft. from Cor. No. 2 of the Ord #12 lode.

A corrugated iron blacksmith shop 19.5 x 31.6 ft., course of long sides N.O5°W., the S.W. Cor. of which bears N.38°-34'E. 199.8 ft. from a point on line 3-4 of the Ord #13 lode. 659 ft. from Cor. No. 3.

N.E. Cor. of which bears N.50°-59'W. 151.2 ft. from Cor. No. 2 of the Ord #14 lode.

A lumber ore bin, 12 x 19.5 ft., course of long sides, S.68°W., the N.E. Cor. of which bears S.71°-42'W., 110.6 ft. from the N.E.E.C. of the Ord #16 lode.

A log house, 15 x 17 ft., course of long sides, N.22° E., the S.W. Cor. of which bears N.27°-21'W., 125.8 ft., from Cor. No. 4 of the Ord #18 lode.

A frame house, 16 x 40 ft., course of long sides, S.25°W., the N.E. Cor. of which bears N.35°-44'W. 158.0 ft. from Cor. No. 3 of the Ord #19 lode.

A frame guest house, 28 x 46 ft., course of long sides N.26°W., the S.W. Cor. of which bears N.63°-37'R.

151.9 ft. from a point on line 3-4 of the Ord #19 lode,
727.8 ft. from Cor. No. 3.

. A well, 4 x 4.8 ft. in the clear of timbers, of unknown depth, the N.W. Cor. of which bears N.26°-17'E. 275.7 ft. from the above described point.

A corrugated iron bunk house, 20 x 30 ft., course of long sides, N.24°W. the S.E. Cor. of which bears N.16°-59'E. 441.1 ft., from the above described point.

A frame bunk house, 20 x 46 ft., course of long sides, N.24°W., the S.E. Cor. of which bears N.09°-28'E. 383.6 ft. from the above described point.

A frame residence, 16 x 32 ft., course of long sides

N.24°W. the S.E.Cor. of which bears N.04°-17'W. 355.4 ft. from the above described point.

A frame residence, 44 x 26 ft., course of long sides N.24°W., the S.W.Cor. of which bears N.15°-53'W. 338.2 ft. from the above described point.

A'frame residence, 32 x 26 ft., course of long sides N.24°W., the S.W.Cor. of which bears N.23°-40'W. 334.8 ft. from the above described point.

A corrugated iron garage, 28. x 30 ft., course of long sides S.66°W., the S.E. Cor. of which bears N.28°-35'W. 335.6 ft. from the above described point.

A frame house, 16 x 32 ft., course of long sides N.24°W., the S.E. Cor. of which bears N.26°-12'W. 437.1 ft. from the above described point.

A frame house, 16 x 32 ft., course of long sides N.24°W., the S.E. Cor. of which bears N.20°-18'W. 437.6 ft. from the above described point.

A frame house, 32 x 38 ft., course of long sides S.66°W., the S.E.Cor. of which bears N.12°-05'W. 446.2 ft. from the above described point.

A frame store, 10 x 24 ft., course of long sides S.66°W., the S.E. Cor. of which bears N.04°-31'W. 462.8 ft. from the above described point.

A frame boarding house, 40 x 40 ft., course of sides N.24°W., the S.E.Cor. of which bears N.02°-07!E. 485.5 ft., from the above described point.

A corrugated iron ware house, 30 x 43.5 ft., course of long sides, N.24°W., the S.E.Cor. of which bears N.09°-37!E. 523.2 ft. from the above described point.

A frame office, 20 x 23 ft., course of long sides N.24°W., the S.E.Cor..of which bears N.13°-41'E. 555.4 ft., from the above described point.

000000000000000

INSTRUMENT AND DETERMINATION OF MERIDIAN.

This survey was made with a 6 inch Berger transit.

The distances were measured with a 660 foot steel tape.

The courses are referred to the true meridian as determined by Polaris observation, verified by direct solar observations.

0000000000000000

REPORT.

The north corners of section 28, T. 7 N., R. 9 E., are probably within the two mile limit of several of the claims on the southwest end of the group, but these corners can not be found,

Inquiry was made of several old residents of the neighborhood and none of them have any knowledge of the corners. Inquiry was also made of the Forest Department and this department has no record of any of the corners in T. 7 N., R 9 E. being found by the rangers. The nearest monuments of the public survey, of my knowledge, from which a survey could be extended for the purpose of running to the neighborhood of corners that might be within the two mile limit of the survey would be those along Tonto Creek, about seven miles east.

U.S.M.M. No. 2 in the Brown Mining District, established by T. W. Hine in 1886 was found but is not within the two mile limit of any of the claims, which made it necessary to establish U.S.L.M. No. 4086 as reported herewith.

U.S.L.M. No. 4086 to which ties are given, is a quartzite stone $12 \times 15 \times 24$ ins., chiseled cross and U.S.L.M. 4086, with mound of stone alongside.

Ties to this monument from Cors. No. 1 of the claims were computed from the tie N.72°-39'W., 1161.7 ft., made direct from Cor. No. 1 of the Ord #19 lode,

The disagreement between these notes and the location notices is due to errors in the notices.

Globe, Arizona. January 22, 1929.

Edwin J. Shewark

United States Mineral Surveyor.

the noweed are extended by the time continue as a de anol sissado maria . THE DEEPER MAN . For . F . Mil moldoek to steemed Without any take ver to tint other and and this to be seen as . here's ed her nie atemos commenced tender ent to ober only any vitaget concerns The second of the second secon est actual renormal and the similar this one assistable tw a come "dire deselt about seven utile" cant tolk all gaints award eds at a . I was . this for at you be the ten of the tenter of the best to the property of the contract of the contrac .altracal Common to Surem othe , 360R estate ods to a large of or a segment stor of units chart . It was it ... Il ... I sale of how to hear areas of is on the body for a self-to be a self-tonotices is the compared in the notices. . Surevaud farbut enfact bester

ESTABLISHMENT OF U.S.L.M. No. 4086.

In the execution of Mineral Survey No. 4086 I am unable to find any approved corner of the public survey within the two mile limit and the survey not being within two miles of U.S.M.M. No. 2 in the Brown Mining District, it was necessary to establish U.S.L.M. No. 4086.

On a prominent knoll which is visible for a great distance in all directions I chiseled a cross and U.S.L.M. 4086 on a quartzite stone showing 12 x 15 x 24 ins., out of the ground, erected a monument of stone 7 ft. base, 6 ft. high S.45°-00'W. 14.0 ft., therefrom, and took the following bearings.

A quartzite stone, 10 x 18 x 24 ins., out of the ground, chiseled cross B.R.-U.S.L.M.-4086, bears S.86°-51'E. 8.54 ft.

A quartzite stone, 12 x 18 x 21 ins. out of the ground, chiseled cross B.R.-U.S.L.M.-4086, bears S.03°-53'E. 12.58 ft.

A quartzite stone, 6 x 12 x 24 ins. out of the ground, chiseled cross B.R.-U.S.L.M.-4086, bears N.27°-53'W. 20.12 ft.

The ore reduction furnace of the Mercury Mines of America Inc., bears S.78°-30'E., 2675.0 ft.

U.S.M.M. No. 2 in the Brown Mining District, established by T.W. Hine in the year 1886, bears S.Ol°-25'-10"E. 14015.9 ft. This monument is a large boulder, showing about 5 x 6 x 7 ft. out of the ground, chiseled U.S.M.M.-N.II-B.D.Mo. on the north side. There is no monument on or alongside of the boulder and the drill hole referred to by Hines as being on top of the boulder is not more than 3/16ths. inch deep and 7/8th. inch diameter. The monument is located on top of the Mazatzal Range of Mountains, about one mile north of the summit of Mt. Ord, in Gila County, about 20 or 30 feet east of the crest of the ridge which is the boundary line between Maricopa


and Gila Counties. Was it not for the timber surrounding this monument it would be visible from U.S.L.M. No. 4086.

As near as can be determined with instrument used, U.S.L.M., No. 4086 is in Latitude 33°-58' North. The longitude is approximately 1110-25' West.

Globe, Arizona. January 22, 1929.

Edwin 9. Stewark

United States Mineral Surveyor.

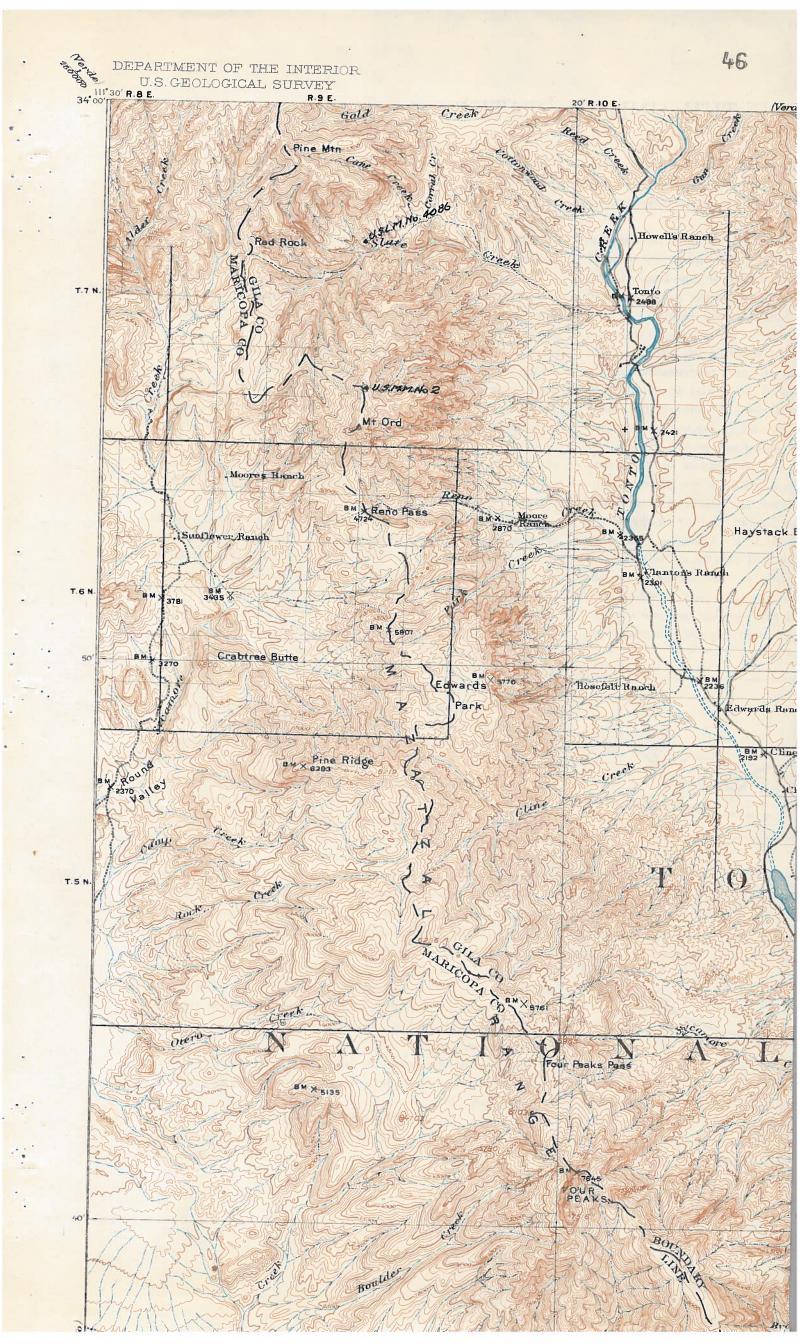

FINAL OATHS FOR SURVEYS.

LIST OF NAMES.

A list of the names of the individuals employed	by Edwin T. Stewart	
United States Mineral Surveyor, to assist in runni	ng, measuring, and marking the lines, corners, and	
boundaries described in the foregoing field notes of	the survey of the mining claim of	
Wesley Goswic	k	
Ord #1, 2, 3, 4, 5, 6,	7, 8, 9, 10, 11, 12, 13, 14, 15 des	
and showing the respective capacities in which they	acted.	
	C. A. Pennington. , Chainman.	
	, Chainman.	
	, Axman.	
	, Flagman.	
FINAL OATHS (OF ASSISTANTS.	
The T C A Romainston		
	I	
amt, do s		
Edwin T. Stewart , United States Mine	eral Surveyor, in marking the corners and surveying	
the boundaries of the mining claim ofWesl	ey Goswick	
Ord #1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, known as the 16, 17, 18, 19 and 20 lodes		
represented in the foregoing field notes as having be	een surveyed by said mineral surveyor and under his	
direction; and that said survey has been in all respec	ts, to the best of our knowledge and belief, faithfully	
and correctly executed, and the corner and boundary m	onuments established according to law and the instruc-	
tions furnished by the Office Cadastral Engineer, at	Phoenix, Arizona.	
C	a Gennington, Chainman.	
	, Chainman,	
	, Axman.	
	, Flagman.	
Subscribed and sworn to by the above-named persons before me this 22nd		
day ofJanuary		
	M. P. Harrison	
y commission expires	Notary Public, Gila	

FINAL OATH OF U.S. MINERAL SURVEYOR

I, Edwin T.Stewart	, U. S. Mineral Surveyor,		
do sclemnly swear that, in pursuance of ins			
Engineer, at Phoenix, Arizona,	, dated December 21, 1928		
I have, in strict conformity to the laws of	the United States, the official regula-		
tions and instructions thereunder, and the	instructions of said Office Cadastral		
Engineer, faithfully and correctly executed	the survey of the Mining Claim of		
Wesley Goswick	, known as the		
Ord #1,2,3,4,5,6,7,8,9,10,11,12,13,1	4,15,16,17,18,19 and 20 lodes,		
situate in Brown	Mining District,		
Gila County,	Arizona, approximately, in Section		
11,12,13,14,15 Township No. 7 N.;	, Range No. 9 E., uns., in the		
Crook National Forest, and designated as Survey No. 4086	, as represented		
in the foregoing field notes, which accurate			
as distinctly marked by monuments on the gro	ound, and described in the attached copy		
of the location certificate, which was recei	ved by me from the Office Cadastral Engi-		
neer with said instructions, and that all co	rners of said survey have been established		
and perpetuated in strict accordance with th	e law, official regulations and instruc-		
tions thereunder; and I do further solemnly	swear that the foregoing are the true and		
orginal field notes of said survey and my re			
and improvements made upon said mining claim			
grantors are as therein fully stated, and th	at the character, extent, location, and		
itemized value thereof are specified therein			
that no portion of said labor or improvements so credited to this claim has been in-			
cluded in the estimate of expenditures upon any other claim.			
	E 0 ff		
	Edwin 9. Stewart U. S. Mineral Surveyor.		
Subscribed and sworn to by the said			
	otary Public,		
day of January , 1929.	this 22nd.		
	M. L. Sarrison		
November 11, 1932.	Motary Public, Gila County, Arizona.		

OFFICE CADASTRAL ENGINEER'S FINAL CERTIFICATE ON FIELD NOTES

Department of the Interior

PUBLIC SURVEY OFFICE

89

	Phoen	ix, Arizona,	
		February 20,	, 19 29
I, Office Cadastral E	Ingineer at Phoenix	Arizona,	*******************
do hereby certify that the	foregoing transcript of the Fi	eld Notes, return and approv	al of the survey
	Wesley Coswick	4	
	2,3,4,5,6,7,8,9,10,		lodes
situate in	Brown		
Mining District 11,12,13, in Section 15, Unsur,	011a 14 & Township No 7 N ,	Range No9 E	approximately and
designated as Survey No.	4086 , has been	correctly copied from the or	iginals on file in
this office; that said Field	l Notes furnish such an accura	te description of said mining	claim as will, if
ncorporated into a patent,	serve fully to identify the pren	nises, and that such reference	is made therein
to natural objects or perm	nanent monuments as will per	petuate and fix the locus the	reof.
I further certify that]	Five Hundred Dollars worth o	f labor has been expended or	improvements
made upon, or for the b	penefit of, each location emb	raced in said mining clair	n by claimant
	or	his	grantors,
and that said improveme	nts consist of 24 cuts,	5 tunnels, 4 shaft	s, l winze
and 2 crosscuts,	with 240.92 ft. of	additional drifti	ng and
crosscutting, to	tal value\$40,665.		7
upon any other claim.	labor or improvements has be		
A. A. M.	is correct and in conforn	mty with the foregoing Field	Notes.
		John D. Adams Office Cade	ustral Engineer.

CERTIFICATE OF APPROVAL OF FIELD NOTES AND SURVEY OF MINING CLAIM

DEPARTMENT OF THE INTERIOR PUBLIC SURVEY OFFICE

	At Phoenix, Arizona
	February 20 , 192 9
I, Office Cadastral Engineer at Phoen	ix, Arizona
do hereby certify that the foregoing and hereto a	attached Field Notes and Return of the Survey of the
Mining Claim of	
Wesley	Goswick
	known as the
ORD #1,2,3,4,5,6,7,8,9,10,11,12,	13,14,15,16,17,18,19 and 20 lodes
situate inBro	wn mining district,
Gila County, Ariz	ona approximately
11,12,13,14 & in Section s 15, Unsur., Township No	
, designated as Survey No.	4086
executed byEdwin T. Ste	wart , U. S. Mineral
Surveyor, December 22,1928 - Janu	ary 18, 1929, under my instructions dated
December 21 ,1	928, have been critically examined and the necessary
corrections and explanations made, and the said	Field Notes and Return, and the Survey they describe,
are hereby approved. The certified copy of the	location certificate filed by the applicant for survey is
on file in this office and a true copy of said cer	tified copy of said location certificate is included and
made a part of the transcript of the field notes.	John Claus
GOVERNMENT PRINTING OFFICE 6—7181	Office Cadastral Engineer.